



whitworth

máquina

machos

UNC

mano



machos

UNC

máquina

machos

# 3202 IZAR

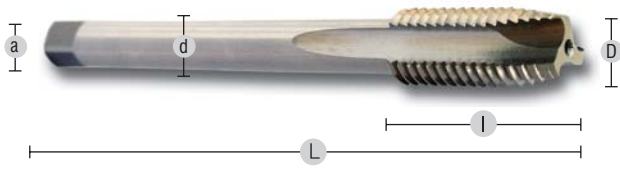

400-800 N/mm <sup>2</sup>	800-1100 N/mm <sup>2</sup>	Fundición Cast/Iron	Cu	Al	HSSE 5% Co
DIN 376	B 3,5-5h	GUN	∞ 10-12°		

Ref.	Cód	D mm	Hilos	L mm	l mm	d mm	Øa	↺
0119100	70446	W 7/16	14	100	22	8	6,2	3
0119101	70417	W 1/2	12	110	24	9	7,0	3
0119102	70447	W 9/16	12	110	26	11	9,0	3
0119103	70443	W 5/8	11	110	27	12	9,0	3
0119104	70419	W 3/4	10	125	30	14	11,0	4
0119105	70444	W 7/8	9	140	32	18	14,5	4
0119106	70449	W 1"	8	160	36	18	14,5	4


## JUEGO DE MACHOS DE MANO UNC

# 3034 IZAR



400-800 N/mm <sup>2</sup>	800-1100 N/mm <sup>2</sup>	Fundición Cast/Iron	Al	HSS	DIN 352
C 2-3h	Tol. 2B	∞ 10°±2	Nº1: Desbaste	Nº2: Semiab.	


Nº3: Acabado



Ref.	Cód	D mm	Hilos	D mm	L1 mm	L2 mm	d mm	K mm	↺
0119200	75860	Nº 1	64	1,85	32	8	2,50	2,10	3
0119201	75861	Nº 2	56	2,18	36	9	2,80	2,10	3
0119202	75862	Nº 3	48	2,52	40	9	2,80	2,10	3
0119203	75863	Nº 4	40	2,85	40	12	3,50	2,70	3
0119204	75594	Nº 5	40	3,18	40	12	3,50	2,70	3
0119205	75596	Nº 6	32	3,51	45	14	4,50	3,40	3
0119206	75597	Nº 8	32	4,17	45	14	4,50	3,40	3
0119207	75598	Nº 10	24	4,83	50	15	5,50	4,30	3
0119208	75599	Nº 12	24	5,49	50	15	6,00	4,90	3
0119209	62732	1/4"	20	6,35	59	20	6,00	4,90	3
0119210	62744	5/16"	18	7,94	63	25	6,00	4,90	3
0119211	62738	3/8"	16	9,53	70	28	7,00	5,50	3
0119212	62750	7/16"	14	11,11	75	30	8,00	6,20	4
0119213	75115	1/2"	13	12,70	80	32	9,00	7,00	4
0119214	62753	9/16"	12	14,29	80	32	11,00	9,00	4
0119215	62741	5/8"	11	15,88	90	36	12,00	9,00	4
0119216	62735	3/4"	10	19,05	105	40	14,00	11,00	4
0119217	62747	7/8"	9	22,23	110	45	18,00	14,50	4
0119218	62756	1"	8	25,40	110	50	20,00	16,00	4
0119219	75864	1 1/8"	7	28,58	132	56	22,00	18,00	4
0119220	75865	1 1/4"	7	31,75	132	56	25,00	20,00	4
0119221	75866	1 3/8"	6	34,93	150	63	28,00	22,00	4
0119222	75867	1 1/2"	6	39,10	150	63	32,00	24,00	5
0119223	75868	1 3/4"	5	44,45	160	58	36,00	29,00	4
0119224	75869	2"	4,5	50,80	180	65	40,00	32,00	4

## COJINETE DE MÁQUINA. UNC

# 3534 IZAR

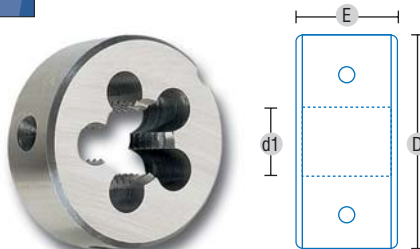

400-800 N/mm <sup>2</sup>	HSS	DIN 223	UNC	Tol. 2A	∞ 10-17°
---------------------------	-----	---------	-----	---------	----------

Chaflán Entrada 1,75 h

Ref.	Cód	d1 mm	Hilos	D mm	E mm
0119300	75557	1/4"	20	20	7
0119301	75561	5/16"	18	25	9
0119302	75559	3/8"	16	30	11
0119303	75563	7/16"	14	30	11
0119304	75556	1/2"	13	38	14
0119305	75564	9/16"	12	38	14
0119306	75560	5/8"	11	45	18
0119307	75558	3/4"	10	45	18
0119308	75562	7/8"	9	55	22
0119309	75565	1"	8	55	22